

# THREE POINT DISCS

## VINYARD TANDEM DISC

**H**heavy wall tubular constructed, 3" x 3" and 4" x 4"



Non reversible disc.

CAT I & II three point hitch.

Easy pull pin gang adjustment.

Designed for narrow vineyards & heavy soil discing.

24" disk blades 9" spacing.

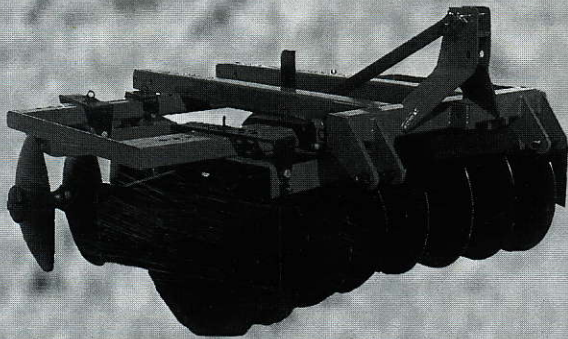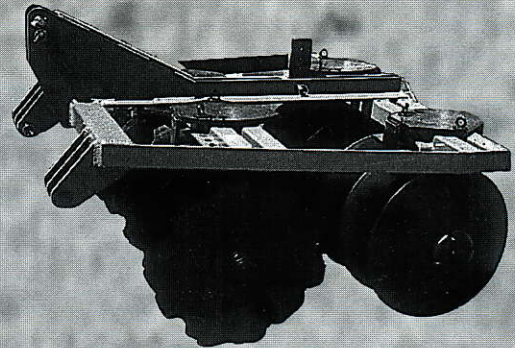

## H.D. THREE POINT ADJUSTABLE DISC

**L**ight, medium and heavy duty reversible vineyard disc.

Heavy wall construction for maximum strength and durability.

Three point CAT I or CAT II Quick Hitch.

Easy pull pin, fully adjustable gangs.

Designed for wider vineyards with heavy soil conditions.

Self aligning trunion mount bearing on HD model.

## THREE POINT OFFSET DISC HARROW

**R**egular heavy duty 3 point offset disc.


Widths from 3'9" to 8'.

CAT I hitch on regular duty

CAT II hitch on heavy duty.

Rear gang and 3 point hitch are adjustable.

Available with blade sizes from 18" to 24" .

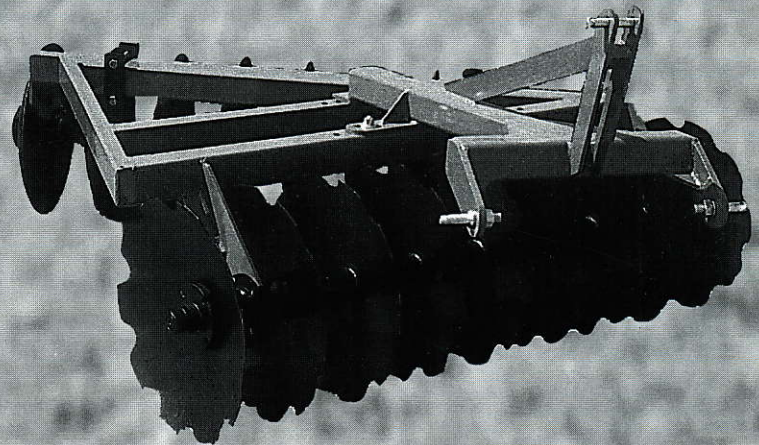

**B.W. Implement Co.**

P.O. Box 758 • Buttonwillow, CA 93206

(661) 764-5254 • Fax (661) 764-5253

[www.bwimp.com](http://www.bwimp.com)

## Vinyard Tandem Three Point Pin Adjust Non-Reversible Disc

Model No.	No. of Blades	Width of Cut	Blade Size	Approx. Wt.
VT24-P-8	8	32 in. to 44 in.	24" x 4.5 mm	1280 lbs
VT24-P-12	12	50 in. to 62 in.	24" x 4.5 mm	1420 lbs
VT24-P-16	16	68 in. to 80 in.	24" x 4.5 mm	1745 lbs

Optional Equipment: Extensions • Bearing Guards

## H.D. Three Point Pin Adjustable Reversible Tandem Vinyard Disc

Model No.	No. of Blades	Width of Cut	Blade Size	Approx. Wt.
RT24P-HD-12F	12	3 ft. 6 in. to 4 ft. 2 in.	24" x 4.5 mm	1530 lbs
RT24P-HD-12	12	4 ft. 2 in. to 5 ft. 2 in.	24" x 4.5 mm	1530 lbs
RT24P-HD-14	14	5 ft. 8 in. to 6 ft. 8 in.	24" x 6 mm	1730 lbs
RT24P-HD-16	16	5 ft. 8 in. to 7 ft.	24" x 6 mm	1960 lbs
RT26P-HD-16	16	5 ft. 8 in. to 7 ft.	26" x 6 mm	2040 lbs
RT24P-HD-18	18	7 ft. 2 in. to 8 ft. 6 in.	24" x 6 mm	2060 lbs
RT26P-HD-18	18	7 ft. 2 in. to 8 ft. 6 in.	26" x 6 mm	2160 lbs
RT24P-HD-20	20	7 ft. 2 in. to 8 ft. 6 in.	24" x 6 mm	2160 lbs
RT26P-HD-20	20	7 ft. 2 in. to 8 ft. 6 in.	26" x 6 mm	2260 lbs
RT24P-HD-22	22	8 ft. 8 in to 9 ft. 8 in.	24" x 6 mm	2360 lbs

Optional Equipment: Extensions • Dirt Shield Fender • Tool Bar Attachment  
Disc Blade Scrapers

Three Point Pin Adjustable Reversible Medium Tandem Disc

Also Available: Three Point Reversible Light Tandem Disc

Three Point Non-Reversible Tandem Disc

## R.O. Three Point Offset Disc Harrow

Model No.	No. of Blades	Width of Cut	Blade Size	Approx. Wt.
RO20-46	12	4 ft. 6 in.	20" x 3.5 mm	715 lbs
RO22-46	12	4 ft. 6 in.	22" x 4.5 mm	770 lbs
RO24-46	12	4 ft. 6 in.	24" x 4.5 mm	870 lbs
RO20-53	14	5 ft. 3 in.	20" x 3.5 mm	890 lbs
RO22-53	14	5 ft. 3 in.	22" x 4.5 mm	935 lbs
RO24-53	14	5 ft. 3 in.	24" x 4.5 mm	1005 lbs
RO22-60	16	6 ft.	22" x 4.5 mm	1040 lbs
RO24-60	16	6 ft.	24" x 4.5 mm	1120 lbs
* RO24-69	18	6 ft. 9 in.	24" x 4.5 mm	1170 lbs
* RO24-76	20	7 ft. x 6 in.	24" x 4.5 mm	1405 lbs
* RO24-83	22	8 ft.	24" x 4.5 mm	1560 lbs.

\* 1 1/2" Gang Bolt Axle

Optional Equipment: Extensions • Disc Blade Scrapers

Also Available: R.O.L. Three Point Disc Harrow