



BWImplement

Wheel Tandem Disc



- Heavy duty structural tubing frame
- Hydraulically controlled dual wheel transport and depth control cylinder.
- Tongue leveling rod for maximum leveling control.
- Front gangs adjustable from 12 to 22 degrees.
- Rear gangs adjustable from 9 to 21 degrees.
- Self aligning trunnion mounted bearings.



Frame: 4" x 4" and 3"x 4" x structural tubing

Gangs: 4" x 4" x structural tubing w/ 1 ½" square axles

Blades: 24"x 6mm notched front and smooth rear with 9" spacing and blade scrapers

Hydraulics: 3 ½" x 8" cylinder w/ depth control and hydraulic hoses


Shank: 1" x 3" center shank w/ adjustable footpiece

Bearings: Greasable trunnion mounted axle bearings with bearing guards

Spools: 9" steel spacer spools and cast iron half spools

Wheels & Tires: Dual 6 lug hubs w/ 9.5L x 15" 8-ply tires

Misc: Rear hitch

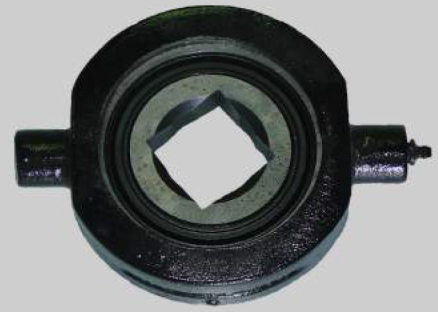

ABOVE:

1-1/2" greasable bearing in cast trunnion mounted housing.



LEFT:

Self leveling, spring cushioned hitch with hand crank.



RIGHT:

Replaceable nylon axle bushing on wheel mount.

Model #	No. of Blades	Cut Width	Approx. Wt.
WT-24HD-24T	24	9'2"	3300
WT-24HD-28T	28	10'6"	3700
WT-24HD-32T	32	12'0	4140
WT-24HD-36T	36	13'8"	4360
WT-24HD-40T	40	15'0"	4800
WT-24HD-44T	44	16'6"	5130
WT-24HD-48T	48	18'6"	5610
WT-24HD-52T	52	19'0	6050
WT-24HD-56T	56	20'6"	6500



ABOVE:

Optional tree guard to protect your orchard trees.

B.W. Implement Co. is a designer and manufacturer of quality agricultural products, providing quality parts and service to meet its customer's needs. We have been located in Buttonwillow, California since 1948. Desinged and manufactured in the west for tough west conditions.